

TAM-15-W

SAW Touch Screen Monitor




TES 

TAM-15-W

OSD Controls



Features

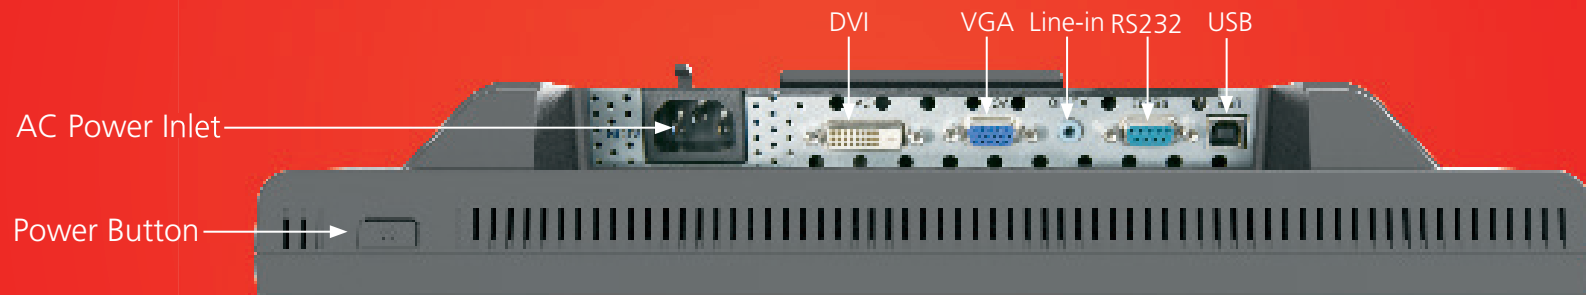

VESA 100X100



Specification

Model	TAM-15-W
Size	15" TFT LCD
Maximum Resolution	1024 x 768
Contrast Ratio	800:1
Brightness (Backlight Type)	350 nits (No Touch), 322 nits (SAW)
View Angle	H:160°, V:150°
Touch LCD Display	
Touch Screen	SAW
Touch Points	1
Touch Screen Interface	USB-HID (Type B)
IO ports	
Serial Port	1 x RS232 (DB9)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA (DB15), 1 x DVI (Optional)
Audio Port	1 x Line in (Optional)
Power Input	1 x AC Inlet
Physical Properties	
Power Supply	AC Input 100~240Vac, 50/60Hz @1.5A
Speaker	-
Housing Color	Dark Gray
Material	Glass, SECC, ABS
Compliance	IP54 Compliant Front Side, Rear IPX1
Dimensions (W x H x D) mm	350.8 x 306.5 x 202.0 mm (With Stand), 350.8 x 274.8 x 59.0 mm (Bezel A, Without Stand), 350.8 x 274.8 x 58.0 mm (Bezel B, Without Stand)
Net Weight (kg)	4.8 kg
Gross Weight (kg)	6.7Kg
Carton (W x H x D) mm	415 x 370 x 290mm
VESA	100 X 100 mm
Safety	
Certifications	CE, FCC, cUL, RCM, TÜV RoHS
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing