

TDS-43

43" P-CAP Touch Screen Monitor




TDS-43


Remote Control Key
(with 1.5 meter cable)




VESA 400x400 mount or bracket mount
SDM (Smart Display Module) Slot support

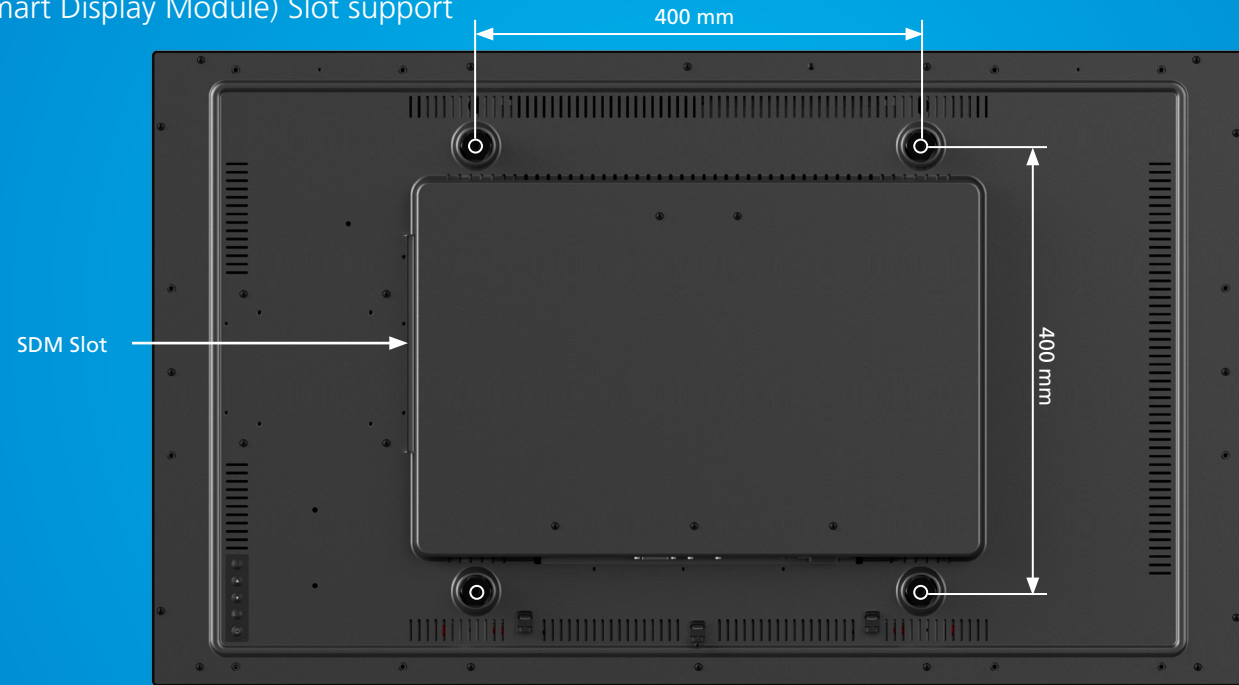

OSD Control

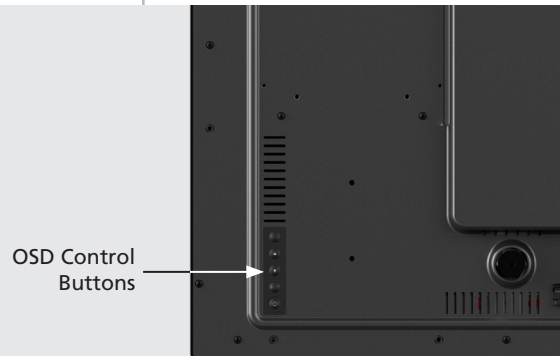


Narrow Bezel

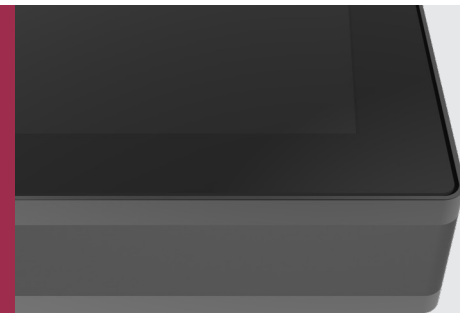

Features


Full HD Resolution / High Contrast

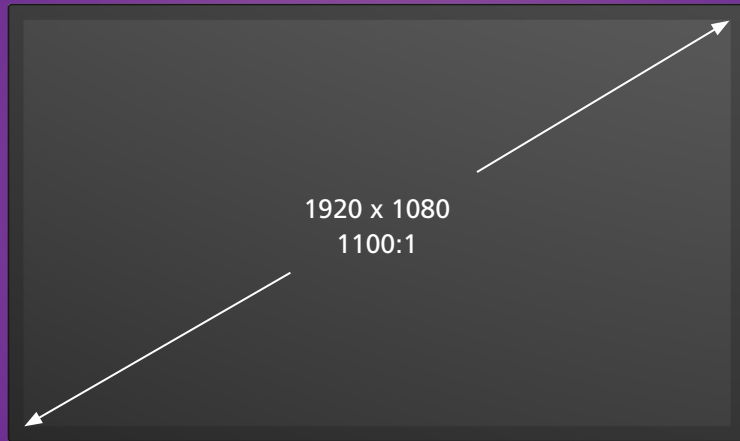


Slim design



Landscape and Portrait

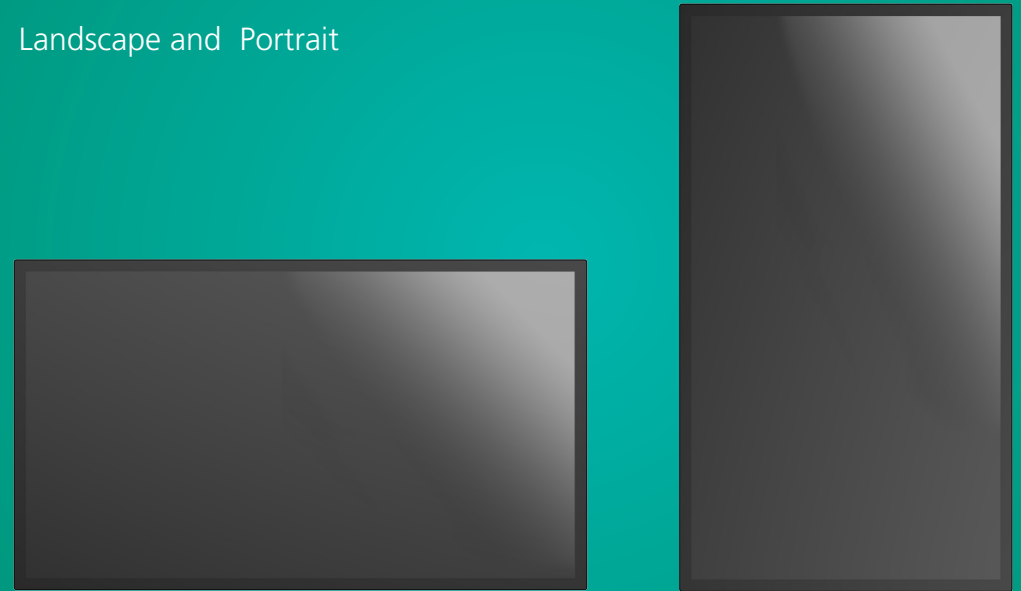

Rich I/O Interfaces

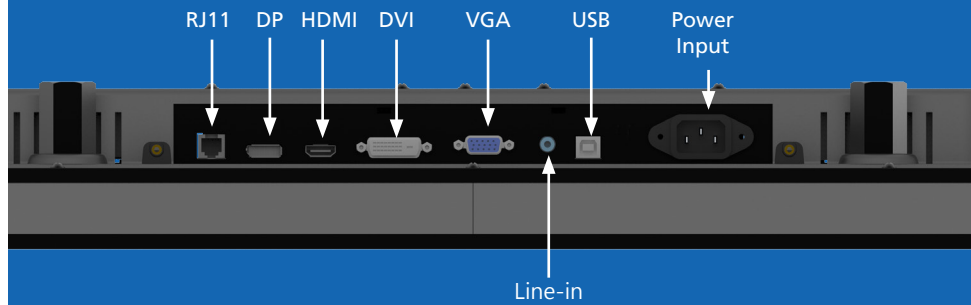

Specification



TDS-43

Size	43" TFT LCD
Maximum Resolution	1920 x 1080
Contrast Ratio	1100:1
Brightness (Backlight Type)	450 nites (No Touch), 351 nits (Touch)
View Angle	H:178°, V:178°

Touch LCD Display

Touch Type	Projected Capacitive
Touch points	40 pts
Touch Screen Interface	USD-HID (Type B)

I/O Port

Serial Port	1 x RJ-11 (for Optional Remote Key)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x HDMI, 1 x DVI, 1 x DP
Audio Port	1 x Line-in
Power Input	1 x AC Inlet

Physical Properties

Power Supply	AC Input 100~240Vac, 50/60Hz
Speaker	2 x 12W
Housing Color	Black
Material	Glass, AL, Plastic (ABS)
Compliance	-
Dimensions (W x H x D) mm	983.2 x 571.4 x 80.7
Net Weight (kg)	19.5 Kg
Gross Weight (kg)	25.0 Kg
Carton (W x H x D) mm	1170 x 745 x 200
VESA	400 x 400 mm
Certifications	CE, FCC, UL, cUL, CCC, RCM, RoHS

Environment

Operating Temperature	0°C ~ 40°C, RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, RH. Non-Condensing

Option

Remote Key	1.5 meter RJ-11 Cable, Controls: Power, Select, Up, Down, Menu
SDM Support	Intel

Dimensions

