

TGF-10

10.1" P-CAP Open Frame Monitor




TGF-10

VESA 100x100 mount support



OSD Control Buttons

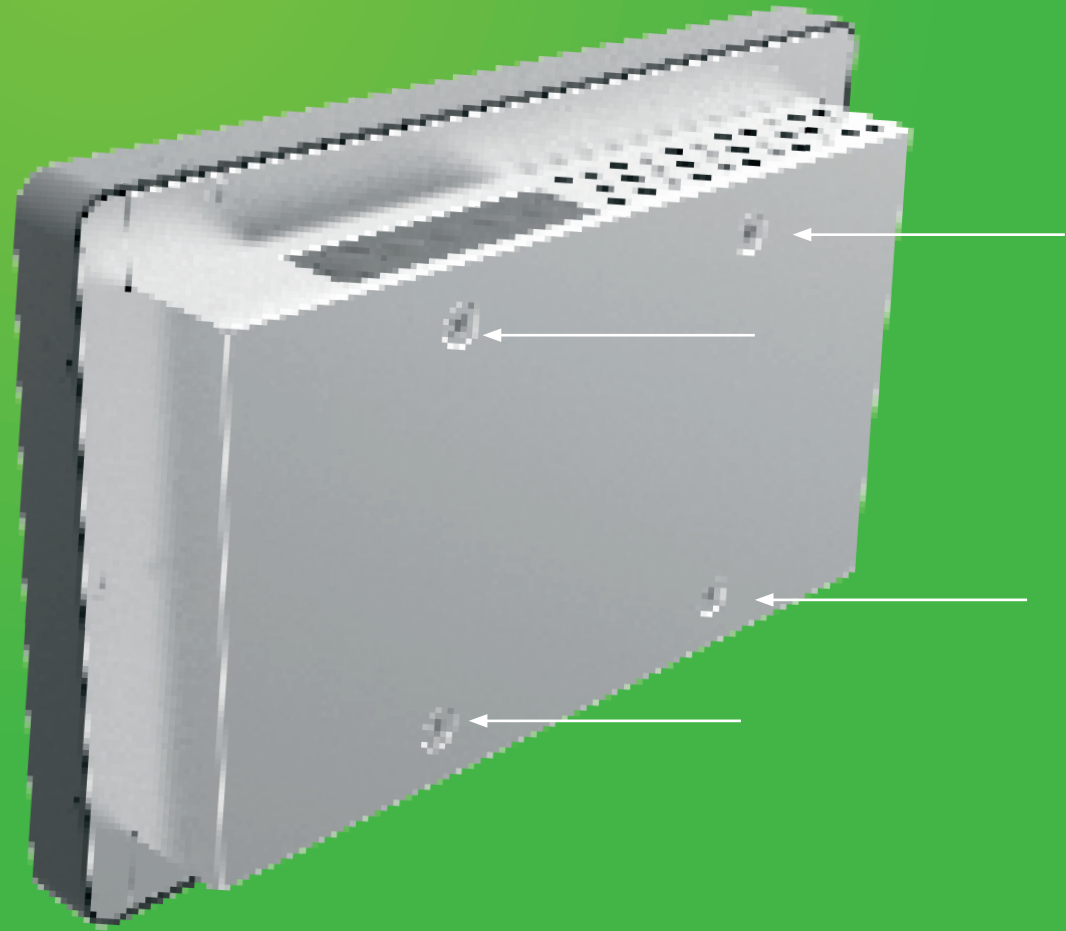

Specification

TGF-10	
Size	10.1" TFT LCD
Maximum Resolution	1280 x 800
Contrast Ratio	800:1
Brightness (Backlight Type)	350 nits (Non-touch), 296 nits (Projected Capacitive)
View Angle	H:170°, V:170°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	5
Touch Screen Interface	1 x USB-HID (Type B)
IO ports	
Serial Port	1 x RJ11
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA (DB15), 1 x DVI
Audio Port	NA
Power Input	1 x 2.1 mm 12V DC Jack with Lock
Physical Properties	
Power Supply	18W (12V / 1.5A) External Power Adaptor
Speaker	NA
Housing Color	Dark Gray
Construction	Glass, SECC metal, Plastic (ABS)
Compliance	IPX1
Dimensions (W x H x D) mm	257.2 x 173.2 x 48.2 mm
Net Weight (kg)	0.95 kg
Gross Weight (kg)	1.27 kg
Carton (W x H x D) mm	318.0 x 218 x 188 mm
VESA	100 X 100 mm
Ball Drop / IK	UL60950 (500 g / 1.3 m) and IK08
Safety	
Certifications	CE, FCC, RCM, LVD, RoHS
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing
Optional Peripheral	
Remote Key	OSD external remote control via RJ11 interface