


# TPMF-17P

P-CAP Open Frame Monitor




# TPMF-17P

OSD Controls

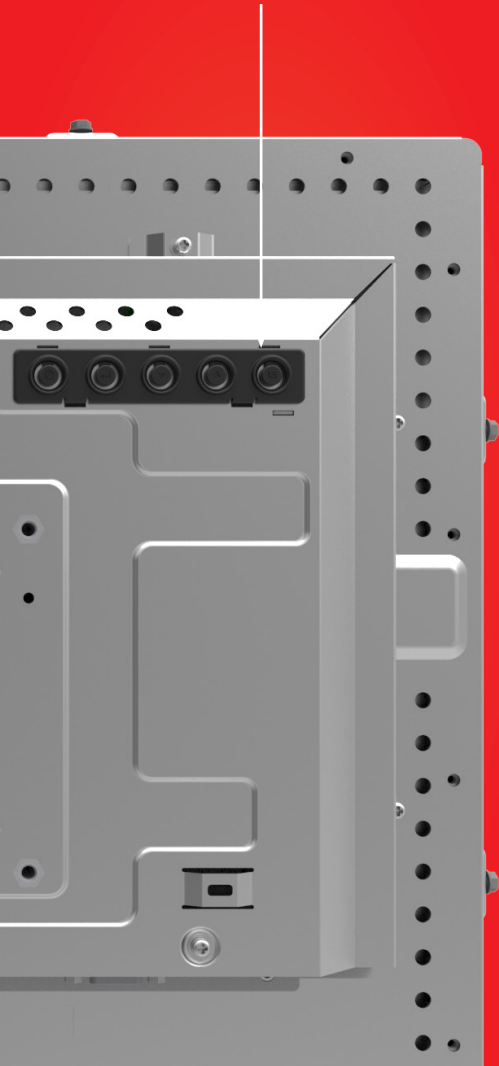


VESA 75 x 75, 100 x100 mount or Side Bracket mount support

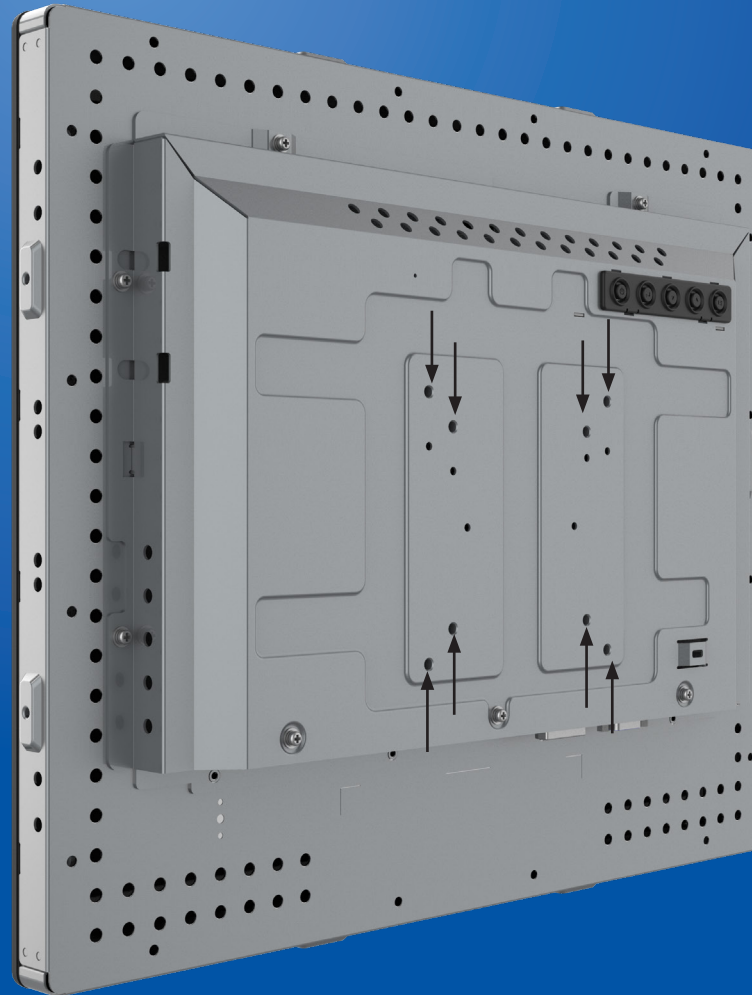

# Specification

TPMF-17P	
Size	17" TFT LCD
Maximum Resolution	1280 X 1024
Contrast Ratio	800:1
Brightness (Backlight Type)	250 nits (Non Touch), 215 nits (Projected Capacitive)
View Angle	H:160°, V:160°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
IO ports	
Serial Port	1 x RJ11 (For remote key)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x DVI
Audio Port	-
Power Input	1 x 2.1 mm 12V DC Jack
Physical Properties	
Power Supply	50W (12V, 4.16A) External Power Adaptor
Speaker	-
Housing Color	Dark Gray
Material	Glass, SECC metal, Plastic (ABS)
Compliance	Front Panel IP65 Compliant, Rear IPX1
Dimensions (W x H x D) mm	394.0 x 330.0 x 57.1 mm
Net Weight (kg)	4.8 kg
Gross Weight (kg)	7.0 kg
Carton (mm)	480.0 x 415.0 x 160.0 mm
VESA	75 x 75 mm, 100 x 100 mm
Safety	
Certifications	CE, FCC
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperatures	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing
Optional Accessory	
Remote Key	Remote Key (1.5 meter RJ-11 Cable, Controls: Power, Select, Up, Down, Menu)

# Interfaces

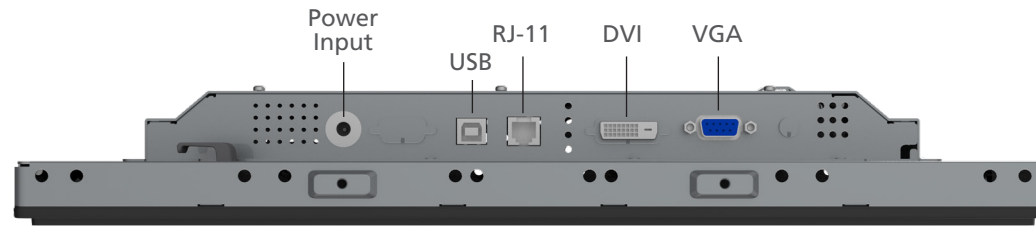

# Dimensions

